

Combistar-HL-220-E12

Datos Técnicos




COMBISTAR HL-220 E12



HL-220-E12

H (max.)	± 21,70 m
A (max.)	± 19,70 m
C (min.)	2,58 m
DxF (min.)	3,38 x 1,16 m
ExF (max.)	4,88 x 1,16 m
H1	3,74 m
H3	3,01 m
LxB	3,74 x 1,20 m
G	2,67 m
M/N	148 mm/235 mm
Ø D	± 3,92 m
 (max.)	500 kg (2 pers. + 340kg)
 (max.)	500 kg (2 pers. + 340kg)
 (sec.)	90/55sec.
	2,0 km/h
	0,5 km/h
	22 x 9 x 16
 (max.)	± 25%
	500 Ah/k5/48 V
 KG	9.120 kg

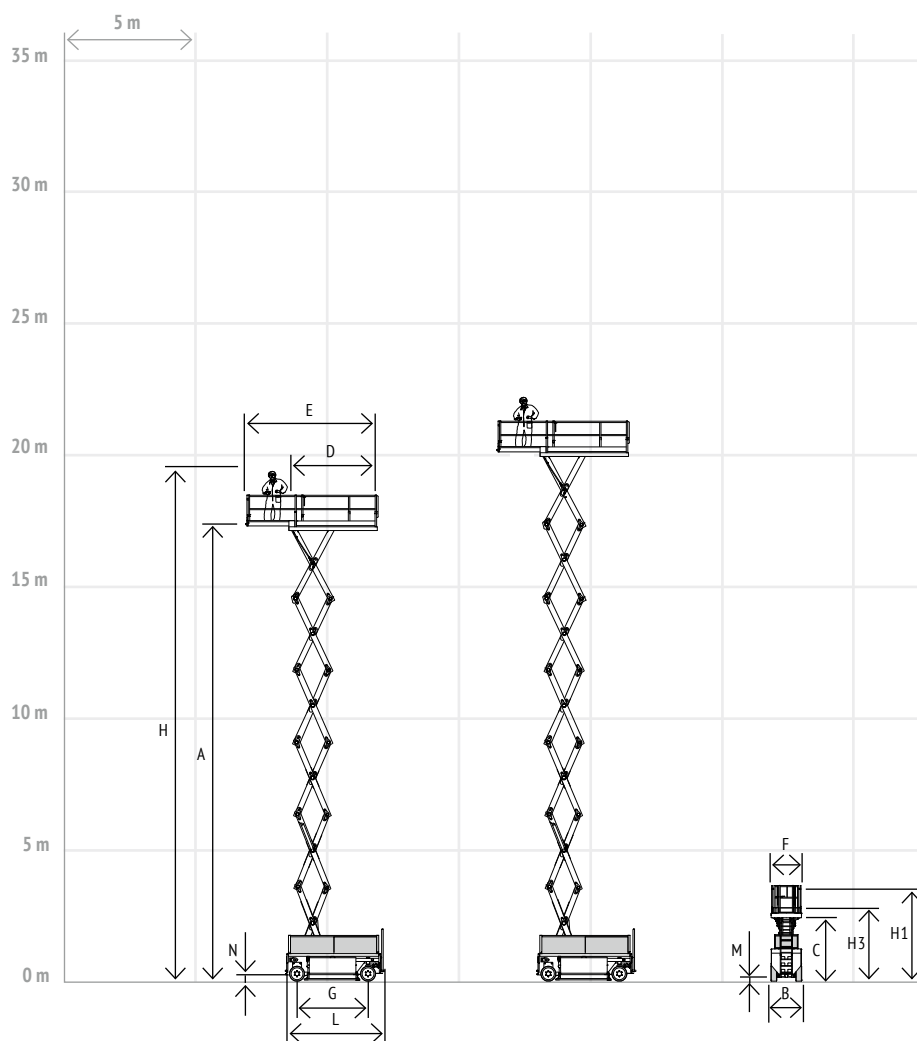

HL-220 E12

OPCIONES

Caja de control con desconexión rápida	●
Contador de horas	●
Cargador (alta frecuencia)	●
Alimentación de 230 V en la plataforma	○
Conducción a altura máxima	●
Conducción proporcional	●
Bloqueo del diferencial	●
Sistema de lubricación Easy Lube	●
Sistema de lubricación Auto Lube	○

CARACTERÍSTICAS DE SEGURIDAD

Faldón tipo tijera	●
Seguridad en el descenso	●
Luces intermitentes	○
Alarma de conducción	●
Descenso de emergencia	●

APLICACIONES

Interior	●
Exterior	●
Temperatura mínima certificada	-15°C